



## FEATURES

- Rear deck expands to 10 feet wide using 6-inch air cylinders
- Lightweight design for impressive payload capacity
- Tapered front gooseneck design
- Gooseneck fenders double as loading ramps
- Stubbed beaver tail at rear
- Prep for rear loading ramps
- Walking beam suspension



## ENABLING YOU TO HAUL MORE

Featuring a capacity of 100,000 pounds in 16 feet, and a base weight of 15,000 pounds, the MGX is sure to deliver many hauling options for the toughest loads. Enjoy the loading advantages of the 21 feet and 4 inches of clear deck space as well as the ability to load onto the gooseneck with fender ramps.


## TRANSPORT OPTIONS FOR EVERY STATE

The rear deck of the XL MGX expands from 102 inches wide to 120 inches wide using two 6-inch air cylinders, eliminating an over width return trip. The kingpin settings are compliant with California's kingpin law. This is especially beneficial for drivers in the Western US, yet it also offers flexibility across the country. Custom lengths available for a variety of applications.

DESIGNED FOR YOU. BUILT TO LAST.

[www.xlspecializedtrailer.com](http://www.xlspecializedtrailer.com) | 877.283.4852

# XL 100 MGX SPECS

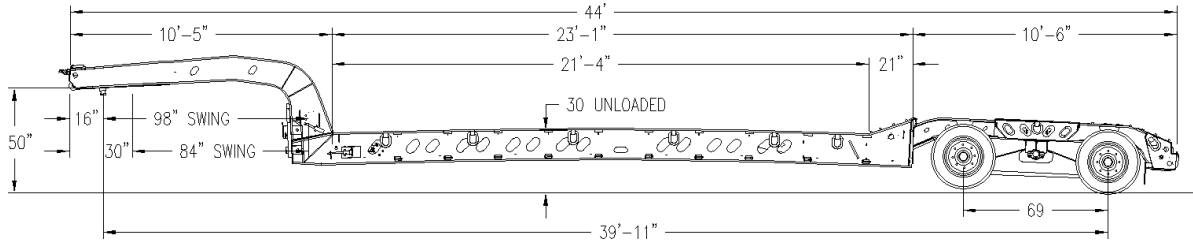

## CAPACITY

capacity: 100,000 lb overall  
concentrated: 100,000 lb in 16'

## OVERALL LENGTH & WIDTH

overall length: 44'  
overall width: 102"

## GOOSENECK

10' 5" tapered front gooseneck  
removable gooseneck  
50" 5th wheel height  
98" swing clearance  
16" 30" king pin setting  
ramps filled with Apitong  
1 pair chain hook on gooseneck

## MAIN DECK

23' 1" long (21' 4" clear deck)  
(2) 15" fabricated i-beams  
23" loaded deck height  
8" ground clearance  
2" Apitong decking - raised  
center deck open  
formed cross members  
on 24" centers  
6 bent d-rings per side  
flatback outrigger brackets only  
tapers to 10.5"  
4' steel bucket well pan  
hooks at front to stow front ramps

## MAIN DECK OPTIONS

additional bent d-rings  
2" x 10" Apitong outrigger planks  
swing out outriggers on 24" centers  
aluminum front ramps  
steel front ramps

## REAR DECK

10' 6" long  
stubbed beaver tail with traction aids  
32" loaded deck height  
expands from 102" wide to 120" wide  
(2) 6" air cylinders to expand  
and retract wheel area  
40" bolsters between axles  
1 pair chain hook on inside of beam  
1 pair chain hook on outside of beam

## REAR DECK OPTIONS

4" amber strobe as third tail light  
steel rear loading ramps  
additional clearance lights  
aluminum rear ramps

## SUSPENSION

walking beam

## AXLES

(4) 25,000 lb nominal, trunnion axles  
69" axle spacing  
2S1M with air brakes on 4 axles

## AXLE OPTIONS

hubometer  
dust shields  
disc brakes

## WHEELS & TIRES

6.75 x 17.5 steel rims  
235 / 75R / 17.5 tires

## WHEEL & TIRE OPTIONS

PSI tire inflation system  
aluminum polished wheels  
aluminum milled wheels

## LIGHTING

12V sealed Grote harness  
rubber mounted LED lights  
2 tail light package  
2 clearance lights per side  
1 mid-turn light per side  
7 pole electric socket

## PAINT

black, IH red, CAT yellow or white  
air & electric done after paint

## PAINT OPTIONS

non-standard paint colors  
non-standard metallic paint

## WARRANTY

2 year structural  
3 year paint  
1 year parts

## AVAILABLE MODELS

XL 90 MGX: Expandable  
XL 100 MGX: Expandable

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852